


3-Way Diverter Port Valves (Sanitary)

Description:

IMI PBM's 3-Way Diverter Port Valves can be an economical alternative to a 3-Way Multi-Port valve depending on the sealing requirements. A single Diverter Port can replace two or three 2-Way valves to reduce cost and space. They are an excellent choice for mounting two relief valves from a common pressure source.

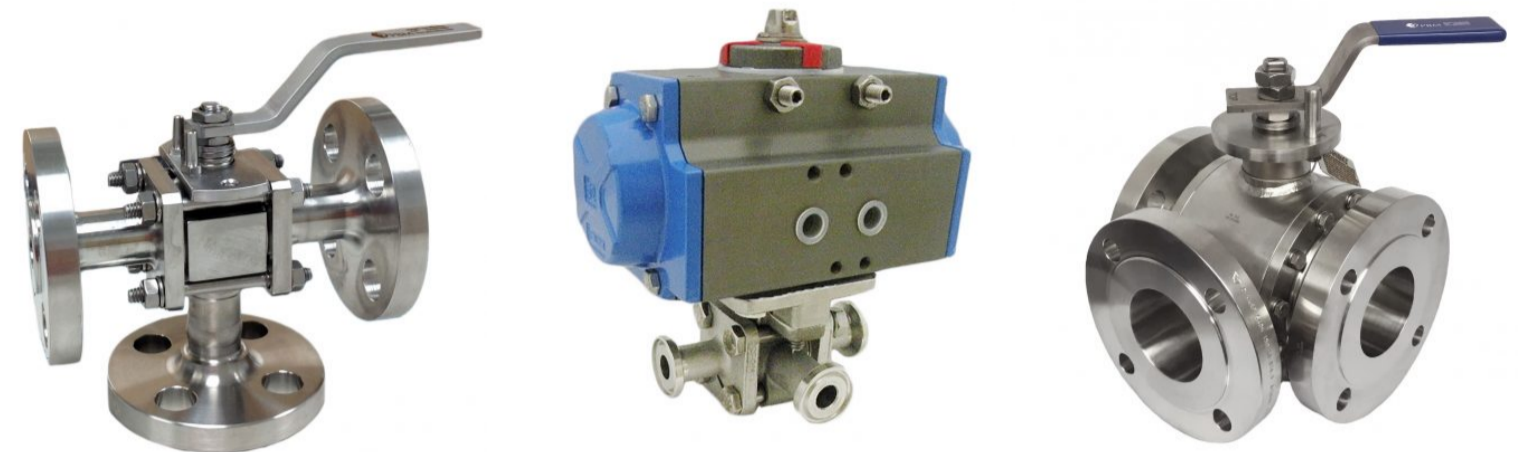

Product Overview

Product Options

Product Bulletins

Related Brochures

Additional Info.

Request Quote

- Sizes 1/2" – 4" – Full port. Consult PBM for additional sizes
- Temperatures from 400° F, 205° C down to -320° F, -200° C
- Live-loaded stem packings
- Materials of construction: stainless steel, other materials available – consult PBM for details
- Pressures to 720 psi CWP (ANSI 300# class)
- Cleaned for oxygen service
- Quarter turn operation
- Locking lever handle or optional oval locking handwheel
- Automation available
- V-TEF™ seats/graphite seals
- Internal and external grounding
- Uni-directional flow and vented ball
- Valve meets or exceeds leakage performance per MSS SP-134
- Optional API-622 Low-e Packing (cannot be LOX cleaned)

Contact Us

Address:

1070 Sandy Hill Road, Irwin, PA 15642

Phone numbers:

724-863-0550 / 800-967-4PBM

E-mail:

info.pbmvalve@imi-critical.com

Business hours:

Monday - Friday 8 AM - 4:30 PM

IMI Critical
Engineering



SSL Certificates